

MODEL APV

Valve Bag Auger Packer

The Taylor Model APV is designed to handle products that are aerated, bind, cake, or bridge easily. The variable speed auger option utilizes Taylor's "bulk and dribble" technology and ensures a fast and accurate weight measurement.

Package Difficult to Feed or Control Materials with Speed and Precision

- 15 lb to 125 lb capacity*
- Flours and starches
- Industrial chemicals
- Sandy cement grouts
- Cakey flours
- Oily products with low bulk density




*Weight range is dependent on product's bulk density. Free product testing recommended.

Specifications

MODEL APV

Diagram dimensions are for reference only

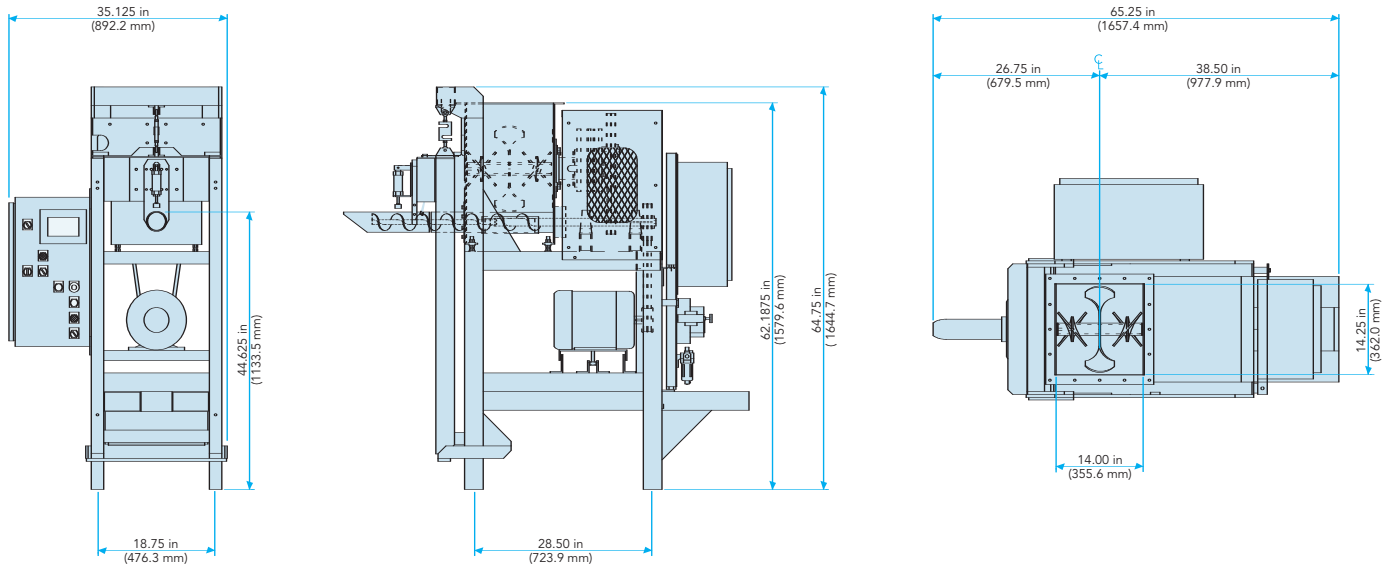

Dimensions	45.75 in x 65.25 in x 64.25 in (1,162.05 mm x 1,657.3 mm x 1,631.95 mm)
Speed	Up to 5 bags per minute
Accuracy	Up to 0.4%
Weight Range	15 lb to 125 lb (6.80 kg to 56.70 kg) Weight range is dependent on product's bulk density. Free product testing recommended.
Scale	Analog, Digital
Configuration	Single or Multiple spouts
Construction	Carbon Steel Blasted and Painted
Electrical Requirements	230/460 VAC, 3 phase, 60 hz
Air Requirements	90 PSI, 2 ft ³ per minute, 200-300 CFM (dust control recommended)
Hopper	Product Agitator and Clean-Out Door standard
Bag Clamp	Integrated pneumatic clamp (standard)
Spout Size	2.5-in (63.5-mm) diameter up to 4-in (101.6-mm) diameter
Enclosures	NEMA 12
Popular Options	Stainless Steel Construction and/or contact areas, Dual Set Point, Bag Settler, Pneumatic Kicker for Bag Discharge, Container Platform and Lift, Removable Screws and Agitator, Automatic Bag Placement System, T3000 Computer Scales control, Bag Inflator with Spout



©2005 Magnum Systems, Inc. All rights reserved. Catalog number: MS.1028.0805